



V2A


Acoustic fan		V2A 100V	V2A 230V
Standard code		V2A041	V2A032
Airflow characteristics			
Max airflow @ 80 Pa	m ³ /h	80	80
Max. pressure	Pa	80	80
Acoustics			
Sound pressure level Lp @ 20 m ³ /h (r = 2m)	dB(A)	33	33
Sound pressure level Lp @ 80 m ³ /h (r = 2m)	dB(A)	35	35
Electrics			
Power supply		100VAC / 50 Hz	230VAC / 50 Hz
Motor type		Electronic commutation	Electronic commutation
Consumption @ 20 m ³ /h	W	5,5	5,5
Consumption @ 80 m ³ /h	W	13	11
Characteristics			
Weight	kg	3,9	3,9
Colour		grey	grey
Material (enveloppe)		PS	PS
Dimension	mm	390 x 390 x 176	390 x 390 x 176
Installation			
Max. available connections *		4	4
Max. connectable extract units (airflow capacity)		2	2
Inlet	mm	ø 80	ø 80
Outlet	mm	ø 100	ø 100
Installation in inhabitable place (cupboard, ceiling, etc)		■	■
Installation in protected non-inhabitable place (attic, etc)		■	■
Installation on wall or ceiling		■	■
Installation on the floor		■	■
Maintenance			
Removable filter		■	■
Easy openable cover (no tools needed)		■	■
Working			
Directly trained propeller		■	■
Max. speed	RPM	1395	1395
Other fonctions			
12VAC output for 2 boost airflow extract units connection		■	■

* Available accessories: ø 80, ø 100 and ø 125 mm

■ : standard

Airflow characteristics

■ Sound pressure level Lp @ 2m in dB(A)

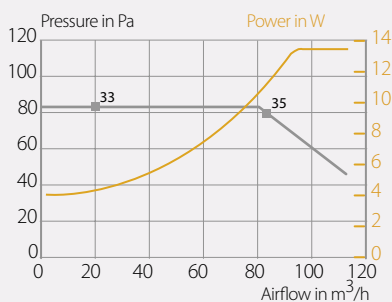

Dimensions in mm

