

V4A


Acoustic fan		V4A 100V	V4A 230V
Standard code		V4A054JA	V4A053EX
Airflow characteristics			
Max. airflow @ 100 Pa	m ³ /h	160	160
Max. pressure	Pa	100	100
Acoustics			
Sound pressure level Lp @ 20 m ³ /h	dB (A)	< 34	< 34
Sound pressure level Lp @ 160 m ³ /h	dB (A)	< 36	< 36
Electrics			
Power supply		100 VAC / 50 Hz	230 VAC / 50 Hz
Motor type		Electronic commutation	Electronic commutation
Consumption @ 20 m ³ /h	W	< 15	< 15
Consumption @ 160 m ³ /h	W	< 25	< 25
Characteristics			
Weight	kg	n.c.	n.c.
Colour		grey	grey
Material (enveloppe)		PS	PS
Dimensions	mm	450 x 450 x 219	450 x 450 x 219
Installation			
Max. available connections		4	4
Max. connectable extract units (airflow capacity)		4	4
Inlet *	mm	ø 100 or ø 125	ø 100 or ø 125
Outlet	mm	ø 125	ø 125
Installation in inhabitable place (cupboard, ceiling, etc)		■	■
Installation in protected non-inhabitable place (attic, etc)		■	■
Installation on wall or ceiling		■	■
Installation on the floor		■	■
Maintenance			
Easily dismountable propeller		■	■
Easy openable cover (no tools needed)		■	■
Working			
Directly trained propeller		■	■
Speed	RPM	1350	1350
Other fonctions			
12VAC output for 4 boost airflow extract units supply		■	■

* Not supplied, available as accessories.

■ : standard

Airflow characteristics

■ Sound pressure level Lp @ 2m in dB(A)

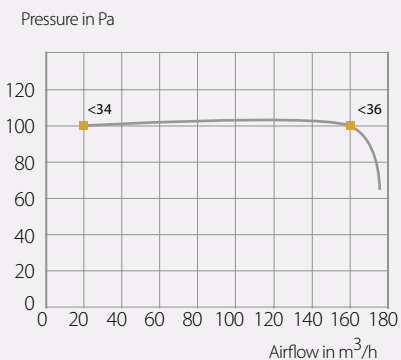

Dimensions in mm

